

Martin Lishman


Bird Scarer

The Scarecrow B.I.R.D. System broadcasts natural bird distress calls through three loudspeaker channels and creates an environment which is hostile to birds.

- 🐦 **10 bird pest distress calls**
- 🐦 **Fully IP rated**
- 🐦 **Built-in remote light sensor**
- 🐦 **Low energy consumption**
- 🐦 **Add up to 30 loudspeakers**
- 🐦 **Unobtrusive**

Scarecrow B.I.R.D. System

Bird Instinctive Reactive Dispersal

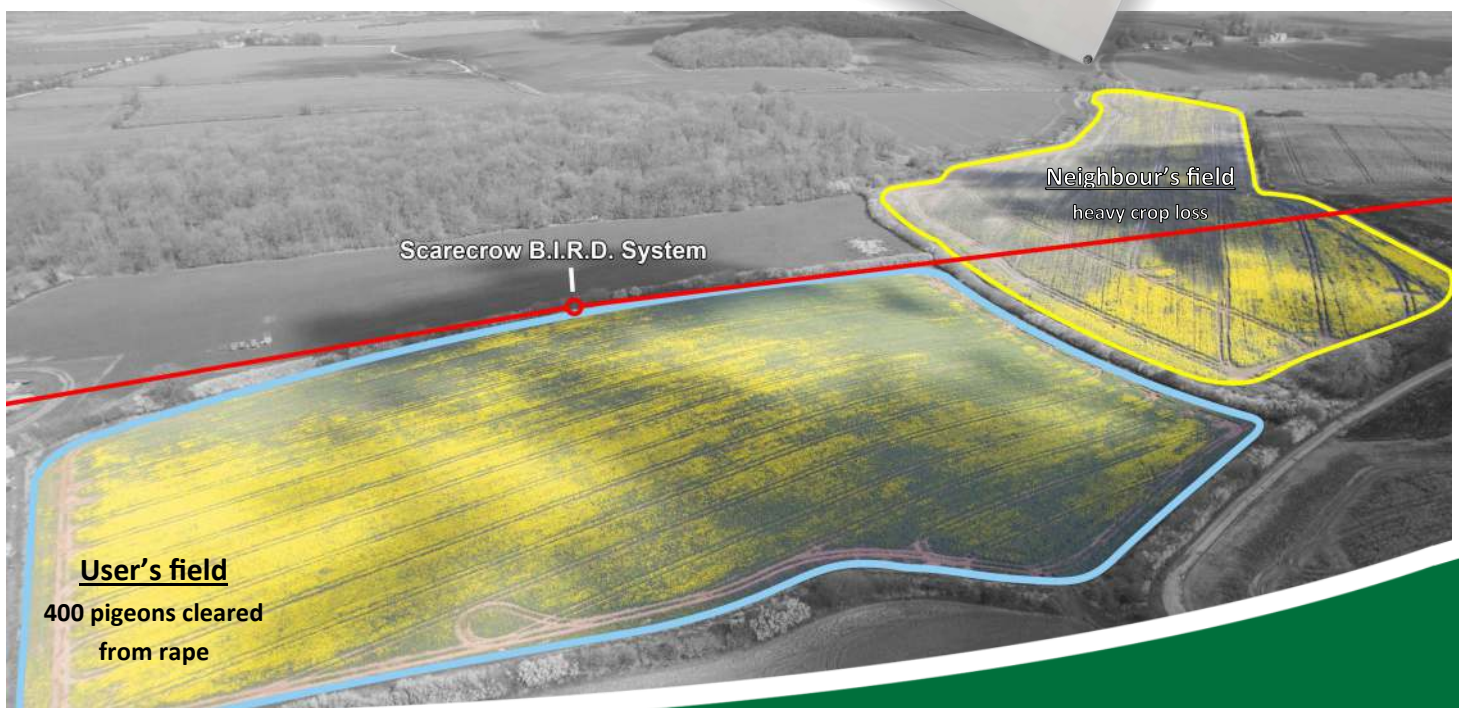

Professional Bird Control

Details and Specifications

Scarecrow B.I.R.D. System (Product Code: BIRDSYSTEM)



Operating Unit Features:

10 pre-programmed digitally cleansed, natural bird distress calls

- Herring Gull, Black Headed Gull, Starling, Rook, Jackdaw, Crow, Pigeon, Canada Goose (2 dialects), Bird of Prey (generic mixed call)

Library of additional calls available

Fully automatic random timing and variable volume play system

Built-in keypad for setting controls

Built-in light sensor for 'dawn to dusk' operation

PIN number activation/security option

Suitable for indoor or outdoor use

Includes mounting bracket with pole clamps (pole not included)

Powered from leisure battery, with mains or solar power options

NB. The Scarecrow B.I.R.D. System can only be truly effective as part of a planned programme of bird control. This includes total hygiene management, such as removal of nests in buildings and suitable netting to prevent roosting, appropriate siting and quantity of speakers, choice and setting of operation functions.

Specifications:

IP rating: IP65

Weight: 2.7kg

Dimensions (c/w mounting bracket): 30 x 29 x 11 cm

Enclosure material: ABS

Power requirements: 12-15vdc, 100-250vac, 12v 80Ah leisure battery

Power consumption: Playing - 300mA (average); Standby - 50mA; Night standby- 5mA

Audio power output: 3 audio channels, max 25W each one (allows up to 10 x 2.5W 100v line speakers per channel)

Operating conditions: -20°C to 55°C @ 95% humidity

Regulatory compliance: CE, RoHS, WEEE



Speaker Features:

System includes 3 x 20W speakers

Can be increased to 30 speakers per system

Operates up to 300m on full volume

Includes stainless steel pole-mounting bracket (pole not included)

Supplied with 4m cable

Specifications:

IP rating: IP66

Weight: 2.37kg

Dimensions: 16.5 x 31 x 32 cm

Enclosure material: ABS

Frequency response: 250Hz to 10kHz

Maximum sound level: 122dB @ 1m

Angles of coverage: 60° x 130°

Power handling: 25W RMS

Operating conditions: -25°C to 70°C

Regulatory compliance: CE, RoHS

Martin Lishman Ltd is the UK distributor of the Scarecrow B.I.R.D System for agriculture

Scarecrow B.I.R.D. System is a trade mark of Scarecrow Group Ltd.

Martin Lishman Ltd reserves the right to alter product specifications at any time without notice.

© Martin Lishman Ltd July 2016

Martin Lishman Ltd

Unit 2B, Roman Bank, Bourne, Lincs, PE10 9LQ, UK

T: +44 (0)1778 426600 F: +44 (0)1778 426555

E-mail: sales@martinlishman.com

www.martinlishman.com

[@Martin_Lishman](https://twitter.com/Martin_Lishman)

[f/martinlishmanltd](https://facebook.com/martinlishmanltd)

Your Scarecrow B.I.R.D. System Supplier: